

# Switching Mode Power Supply


## PWR-DC1205-C8-EU



## Specifications

| Model                     | PWR-DC1205-C8-EU                                     |
|---------------------------|--|
| Power                     |  |
| Appearance                | White  |
| Input                     | 200 to 240 VAC, 47 to 63 Hz                          |
| Output                    | 12VDC, 60W Max Total, 1A Max per Channel             |
| Cable Length Compensation | Normal: 12 VDC<br>Long: 13.5 VDC<br>Ex-Long: 15 VDC  |
| Ripple and Noise          | 0.15 Vp-p (150 mV)                                   |
| AC Input Connector        | C8   |
| DC Output Connector       | DC Plug: grid terminal                               |
| LED Indicator             | Green  |
| Certification             | CE   |
| Operating environment     | 0°C to 40°C (32°F to 104°F), ≤90% (non-condensing)   |
| Storage environment       | -20°C to 70°C (-4°F to 158°F), ≤95% (non-condensing) |

# Dimensions

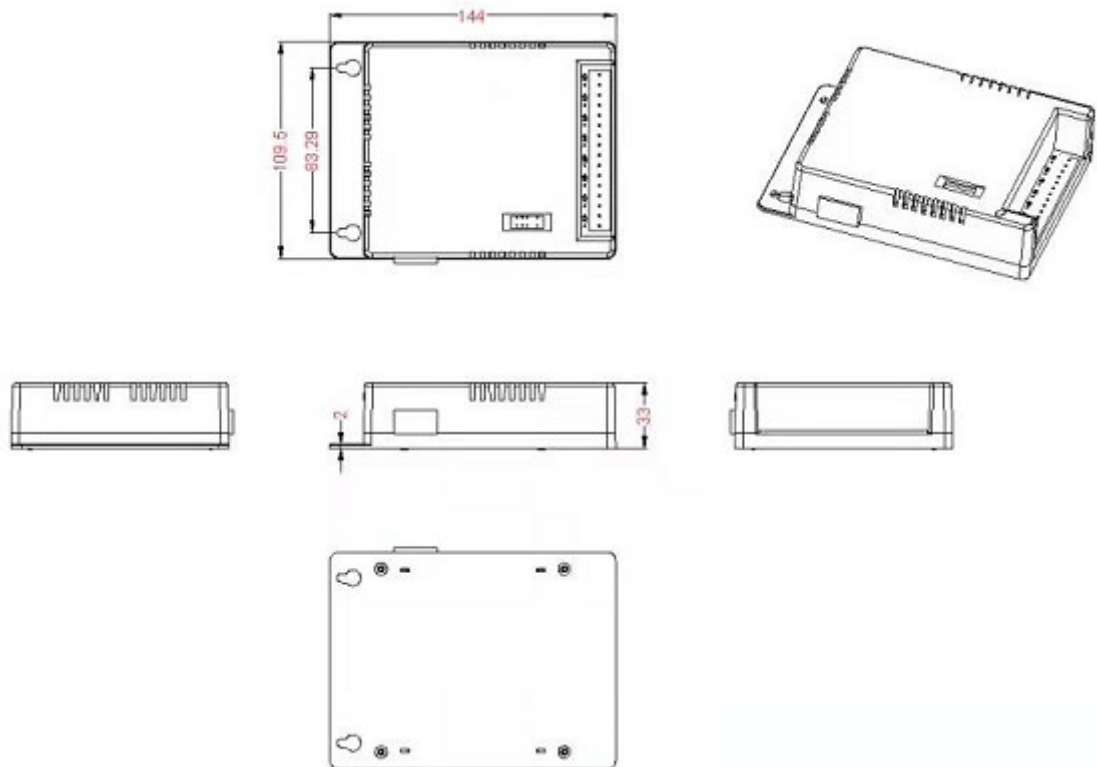

### Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.  
\*Product specifications and availability are subject to change without notice.  
\*Despite our best efforts, technical or typographical errors may exist in this document.  
Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.